



425~440W

M10 solar panels Aquaman series

Mono SMBB TOPCon large size half cut
full black double glass solar panel

Elegant design in all-black appearance, harmonious integration with the components of the building to provide an intense aesthetic experience. Products can match different installation conditions, taking into account high adaptability and high compatibility. With mature support and inverter scheme, customized design for distributed scenarios.

MODULE CHARACTER



Exceptional PID Resistance



Salt mist resistance/Ammonia resistance
/dust and hail resistance



Production process reliability test



0~+5W Positive Tolerance



Lower LID / LETID



Aesthetic appearance design



Reduce BOS cost increase ROI



Non-destructive cutting


CERTIFICATION

IEC61215/IEC61730

ISO9001:Quality Management System

ISO14001:Environmental Management System

ISO45001:Occupational Health and Safety Management System

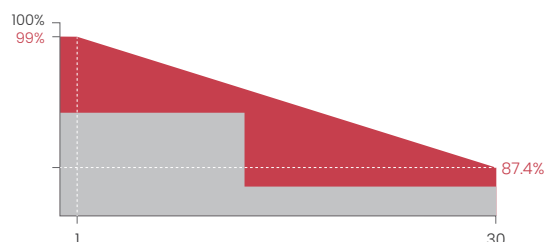

Linear performance warranty



Product warranty



SR-54MNHLPProD 425w-440w Aquaman series



Module Type	SR-54M 425NHLProD		SR-54M 430NHLProD		SR-54M 435NHLProD		SR-54M 440NHLProD	
Module Efficiency (%)	21.78		22.03		22.29		22.54	
Tolerance (W)	0 ~ +5		0~+5		0~+5		0~+5	
Test Environment	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power Pmax(W)	425	320.62	430	324.39	435	328.16	440	331.93
Open Circuit Voltage Voc(V)	38.33	36.61	38.56	36.83	38.79	37.05	39.02	37.27
Short Circuit Current Isc(A)	14.17	11.44	14.25	11.51	14.34	11.57	14.41	11.64
Maximum Power Voltage Vm(V)	31.67	29.72	31.86	29.90	32.05	30.07	32.24	30.25
Maximum Power Current Im(A)	13.42	10.82	13.50	10.88	13.57	10.94	13.65	11.01
Cell Type (mm)	M10 TOPCon							
Number of Cells(Pcs)	108(6×18)							
Maximum System Voltage(V)	DC1500							
Temp.Coeff.of Voc (%/°C)	-0.249							
Temp.Coeff.of Isc (%/°C)	0.045							
Temp.Coeff.of Pm (%/°C)	-0.3							
Operating Temperature(°C)	-40 to 85							
Nominal Operating Cell Temperature(NOCT) (°C)	45±2							
Max.Series Fuse (A)	30							
Pressure Bearing(Pa)	5400							
Wind Bearing (Pa)	2400							

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5
NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind speed 1m/s

Different backside power gains(440W)	10%	15%	20%	25%
Peak Power Pmax(W)	484	506	528	550
Open Circuit Voltage Voc(V)	39.03	39.05	39.06	39.07
Short Circuit Current Isc(A)	15.85	16.57	17.28	18.00
Maximum Power Voltage Vm(V)	32.25	32.26	32.27	32.28
Maximum Power Current Im(A)	15.01	15.69	16.36	17.04



MATERIAL DETAILS

Frame	Anodized aluminum	Cable&Connector	4mm ² , EVO2 or EVO2 compatible
Cell	6×18pcs mono solar cell	Junction Box	IP≥68, TÜV & UL
Glass	2×2.0mm Anti-Reflection Coating Heat Strengthened Glass	Net length of Cable	350mm or as customer's requirements







PACKING DETAILS

Dimension	1723×1133×30mm	Weight	23.7kg
Loading Capacity	962pcs/40HC	Packing	37pcs/pallet

IV CURVES

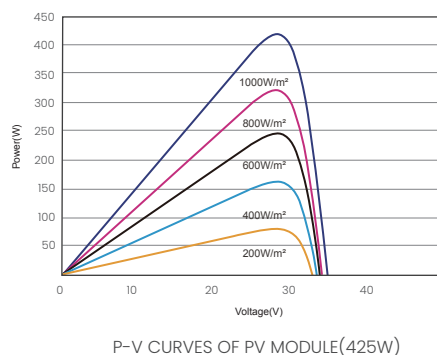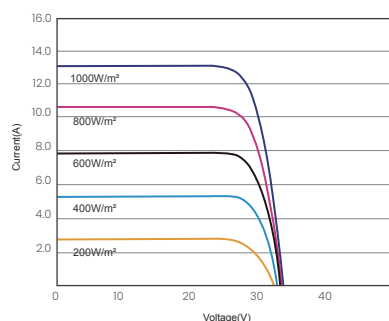

ENGINEERING DRAWINGS

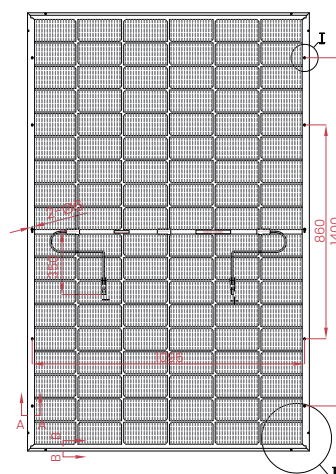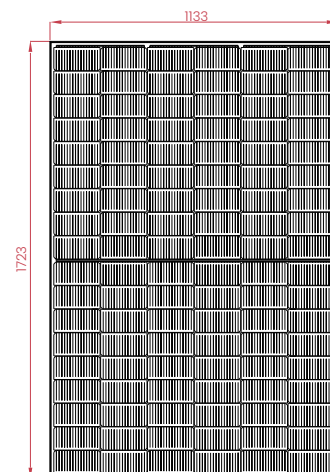

Length: ±2mm
Width : ±2mm
Thickness : ±1mm
Pitch-row : ±2mm