



340w~355w

M6 solar modules Ninja series

Mono MBB perc large size half cut
full black module

The product adopts MBB high efficiency PERC cell combined with half cut. It can cope with the rising efficiency and diversification demand of residential roofs, industrial and commercial roofs, and large ground power stations.

MODULE CHARACTER

-  PID Resistance
-  Salt mist resistance
Ammonia resistance
dust and hail resistance
-  Production process reliability test
-  0~+5W Positive Tolerance
-  Mono MBB half cut
-  Reduce BOS cost increase ROI
-  BIPV All black BIPV


CERTIFICATION

IEC61215/IEC61730

ISO9001:Quality Management System

ISO14001:Environmental Management System

ISO45001:Occupational Health and Safety Management System

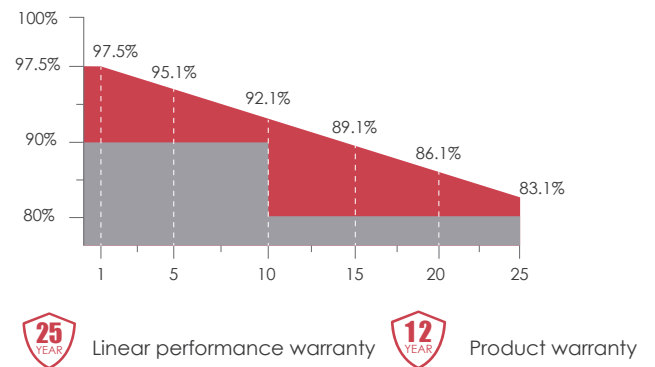

SUNRISE ENERGY CO., LTD

TEL:+86-519-81688389 E-mail:info@sunriseenergy.cn

ADD:No.20 Tongzi River West Road, Zhonglou Development Zone, Changzhou, Jiangsu



Module Type	SR-M660340HLP		SR-M660345HLP		SR-M660350HLP		SR-M660355HLP	
Module Efficiency (%)	18.2		18.47		18.74		19.01	
Tolerance (W)	0~+5		0~+5		0~+5		0~+5	
Test Environment	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power Pmax(W)	340	251.79	345	255.49	350	259.19	355	262.89
Open Circuit Voltage Voc(V)	40.03	37.32	40.28	37.56	40.52	37.78	40.72	37.97
Short Circuit Current Isc(A)	10.85	8.72	10.94	8.79	11.04	8.87	11.12	8.93
Maximum Power Voltage Vm(V)	32.89	30.41	33.09	30.6	33.29	30.78	33.49	30.88
Maximum Power Current Im(A)	10.34	8.28	10.43	8.34	10.52	8.42	10.61	8.48
Cell Type (mm)	166x83(9BB Mono-Crystalline Silicon)							
Number of Cells (Pcs)	120(6x20)							
Maximum System Voltage (V)	DC1500							
Temp.Coeff.of Voc (%/°C)	-0.285							
Temp.Coeff.of Isc (%/°C)	0.055							
Temp.Coeff.of Pm (%/°C)	-0.365							
Operating Temperature (°C)	-40 to 85							
Nominal Operating Cell Temperature(NOCT) (°C)	45±2							
Max.Series Fuse (A)	20							
Pressure Bearing (Pa)	5400							
Wind Bearing (Pa)	2400							

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5
 NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind speed 1m/s


MATERIAL DETAILS

Frame	Anodized aluminum	Glass	3.2mm low-iron tempered suede glass
Cell	6x20pcs 166x83mm mono solar cell	Junction Box	IP≥68,TÜV & UL
Diode quantity	3	Cable&Connector	4mm ² , EVO2 or EVO2 compatible
Cable length	350mm or as customer's requirements		


PACKING DETAILS

Dimension	1776x1052x35mm	Weight	20
Loading Capacity	858 pcs / 40'HC 360 pcs / 20'GP	Packing	31pcs/pallet


ENGINEERING DRAWINGS

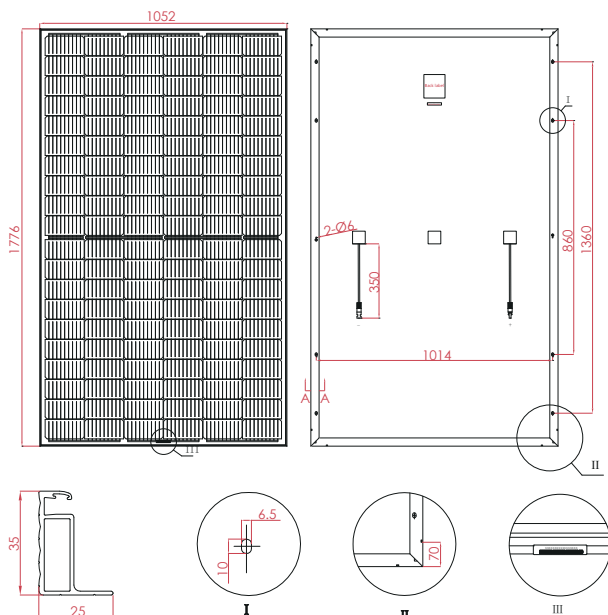

IV CURVES

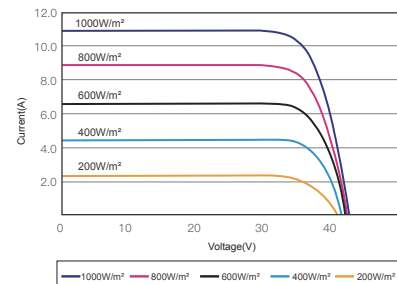

I-V CURVES OF PV MODULE(350W)

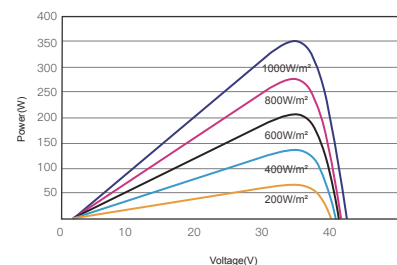

P-V CURVES OF PV MODULE(350W)